

Antimicrobial Domestic Hot water Expansion Tanks

TTA-Rx Series

Wessels TTA-Rx series ASME
Fixed Diaphragm Tank For
Expansion Pressure Control With
WessView, Pressure Gauge and
Antimicrobial Internal
Optional: WessGuard Upgrade

APPLICATIONS

Open-System

Potable

Water Heating

Fresh Hot Water

R/O Water



Wessels TTA-Rx vessels are ASME fixed diaphragm type pre-charged expansion tanks with an antimicrobial silver plated system connection. They are designed to absorb expansion volumes, control pressure, and fight biological growth in potable water heating systems. TTA-Rx vessels feature the industry's highest acceptance reservoir volume. The system's expanded water is contained in a fixed heavy-duty butyl bladder that prevents tank corrosion, waterlogging and is specially formulated to fight the build-up of bacteria. All TTA-Rx expansion tanks can be installed vertically or horizontally.


ADVANCED Rx PROTECTION

- Silver plated antimicrobial system connection fights the growth of harmful biofilms and pathogens
- Special formulation heavy-duty butyl bladder
- Pressure gauge integrated
- WessView® bladder integrity monitor included
- WessGuard® proximity sensor port adaptable
- Easy-access air valve
- Tamper-resistant secure guard mount
- Designed and fabricated in accordance with ASME Boiler & Pressure vessel code
- Standard design pressure is 150 psi (8.6 bar)
- Available in carbon steel, 304 or 316L stainless steel
- Factory pre-charge pressure set to high 40 psi and field adjustable
- Separation of water and air with bladder
- Higher pressure ratings available



SINCE 1908

wessels
company

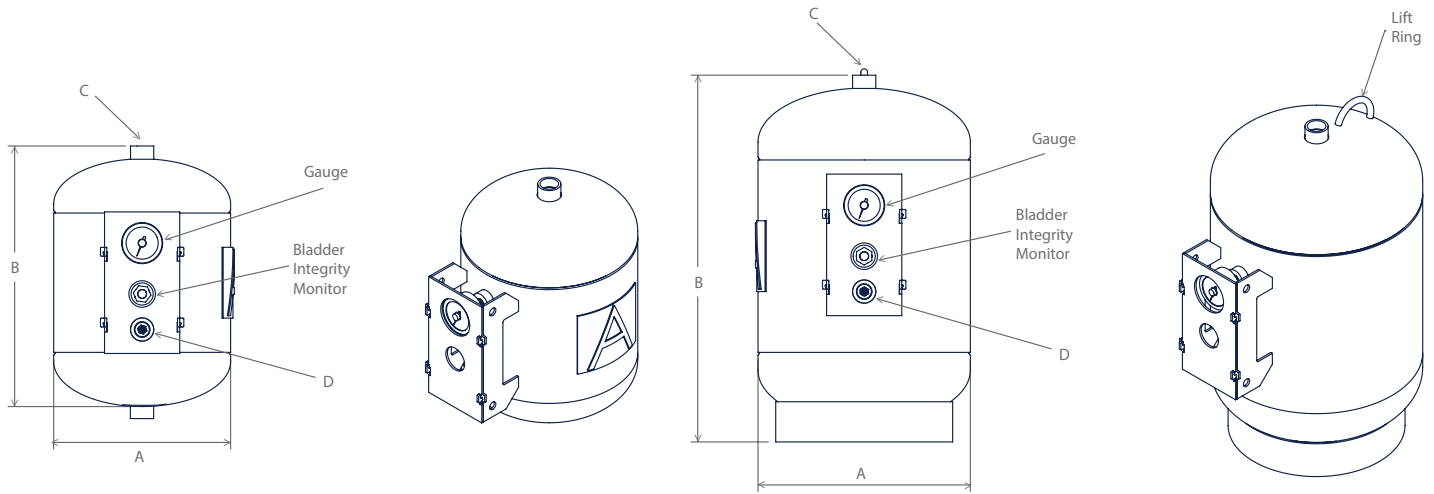

TTA-5-Rx & TTA-12-Rx

TTA-20-Rx TO TTA-210-Rx

MODEL	DIMENSIONS (in.)					APPROX. WEIGHT (lbs)
	A	B	SYSTEM CONNECTION	CHARGING VALVE	E	
			C	D		
TTA-5-Rx	10	14	3/4	0.302" - 32NC	-	22
TTA-12-Rx	12	14	3/4	0.302" - 32NC	-	28
TTA-20-Rx	12	20	3/4	0.302" - 32NC	10	34
TTA-30-Rx	16	24	1	0.302" - 32NC	14	64
TTA-42-Rx	16	31	1	0.302" - 32NC	14	88
TTA-60-Rx	16	34	1	0.302" - 32NC	14	93
TTA-80-Rx	16	45	1	0.302" - 32NC	14	109
TTA-100-Rx	20	39	1	0.302" - 32NC	18	148
TTA-125-Rx	20	50	1	0.302" - 32NC	18	175
TTA-160-Rx	24	47	1 1/2	0.302" - 32NC	22	259
TTA-180-Rx	24	50	1 1/2	0.302" - 32NC	22	268
TTA-210-Rx	24	53	1 1/2	0.302" - 32NC	22	283

Note:

- Tanks are factory pre-charged at 40 psi and field adjustable.
- California code-sight glass is available upon request.
- Lifting on models TTA-20-Rx thru TTA-210-Rx
- Available with mounting clips.

TYPICAL SPECIFICATION

Furnish and install, as shown on plans, a _____ gallon _____" diameter X _____" (high) pre-charged steel domestic hot water expansion tank with a fixed FDA heavy-duty butyl diaphragm. The tank is to incorporate silver plated antimicrobial system connection. The tank shall be equipped with a NPT system connection and a 0.302"-32 charging valve connection (standard tire valve) to facilitate the on-site charging of the tank to meet system requirements. The tank must be constructed in accordance with most recent addendum of Section VIII Division 1 of the ASME Boiler and Pressure Vessel Code, and rated for 150 psi working pressure. Products comply with NSF/ANSI Standard 61.

Each tank shall be Wessels model number TXA-_____-Rx or approved equal.

UPGRADE TO SMART WESSGUARD® TANK PROTECTION

Wessels Type TTA-Rx-WG Smart Tanks are ASME fixed bladder type pre-charged, expansion tanks, with patented WessGuard® bladder monitor. They are designed to absorb the expansion forces and control the pressure in heating/cooling systems and come equipped with a uniquely designed capacitive sensor that is sensitive to any movement inside the tank.

The system's expanded water is contained in a heavy-duty bladder preventing tank corrosion and waterlogging problems. If the bladder extends beyond the normal movement, WessGuard® monitor will activate an audible LED alarm and energy management system to notify maintenance staff of a potential system issue.

